


### DESCRIPTION

UCLAMP1201P is a low-capacitance Transient Voltage Suppressor (TVS) designed to provide electrostatic discharge (ESD) protection for data, control or power lines. With maximum capacitance of 15pF only, UCLAMP1201P.TCT is designed to protect parasitic-sensitive systems against overvoltage and over-current transient events. It complies with IEC61000-4-2 (ESD), Level4 ( $\pm 15\text{kV}$  air,  $\pm 8\text{kV}$  contact discharge), very fast charged device model (CDM) ESD and cable discharge event (CDE), etc.

UCLAMP1201P uses ultra-small SLP1006P2 package. Each UCLAMP1201P device can protect one data line. It offers system designers flexibility to protect single data line where space is a premium concern.

### APPLICATIONS

- Serial and Parallel Ports
- Notebooks, Desktops, Servers
- Projection TV
- Cellular handsets and accessories
- Portable instrumentation
- Peripherals
- MP3 Players



### FEATURES

- Peak Power Dissipation 150 W (8/20 $\mu\text{s}$ )
- Stand-off voltage: 12V
- Low capacitance 15pF (Maximum)
- Replacement for MLV(0402)
- Protects I/O Port
- Low Clamping Voltage
- Low Leakage
- Low Capacitance
- Response Time is <1ns
- Meets MSL 1 Requirements
- ROHS compliant

### MACHANICAL DATA

- SLP1006P2 package
- Flammability Rating: UL 94V-0


### ABSOLUTE MAXIMUM RATING(Tamb=25°C)

Symbol	Parameter	Value	Unit
V <sub>ESD</sub>	ESD per IEC 61000-4-2 (Air)	$\pm 25$	kV
	ESD per IEC 61000-4-2 (Contact)	$\pm 20$	
P <sub>PPP</sub>	Peak Pulse Power(tp=8/20 $\mu\text{s}$ waveform)	150	W
T <sub>L</sub>	Lead Soldering Temperature	260(10sec.)	°C
T <sub>J</sub>	Operating Temperature Range	-55~125	°C
T <sub>STG</sub>	Storage Temperature Range	-55~150	°C
T <sub>L</sub>	Lead Solder Temperature-Maximum (10 Second Duration)	260	°C


**ELECTRICAL CHARACTERISTICS (Tamb=25°C)**

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
V <sub>RWM</sub>	Reverse Working Voltage				12.0	V
V <sub>BR</sub>	Reverse Breakdown Voltage	I <sub>T</sub> = 1mA	13.3			V
I <sub>R</sub>	Reverse Leakage Current	V <sub>RWM</sub> = 12V			0.2	μA
V <sub>C</sub>	Clamping Voltage	I <sub>PP</sub> = 1A, t <sub>p</sub> = 8/20μs			19	V
		I <sub>PP</sub> = 5A, t <sub>p</sub> = 8/20μs			26	V
C <sub>J</sub>	Junction Capacitance	V <sub>R</sub> = 0V, f = 1MHz		13	15	pF


**ELECTRICAL CHARACTERISTICS CURVE**

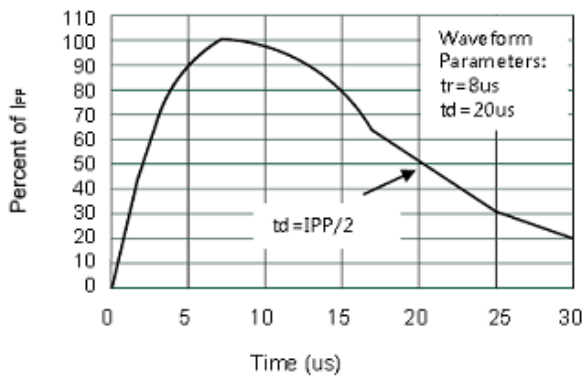



Pulse Waveform

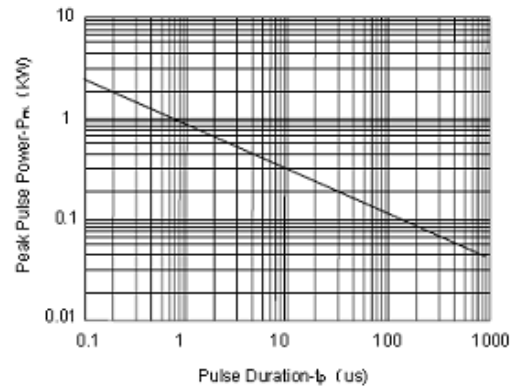

Non-Repetitive Peak Pulse Power vs. Pulse Time

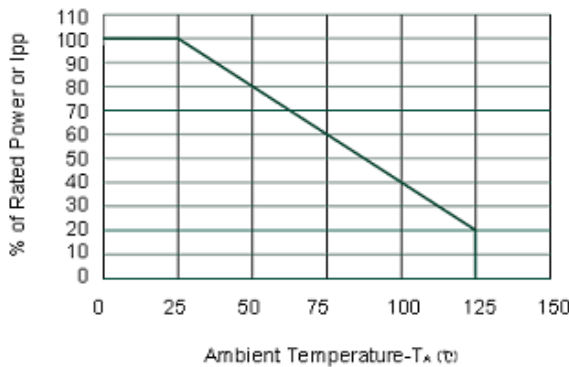


SLP1006P2 PACKAGE OUTLINE DIMENSIONS

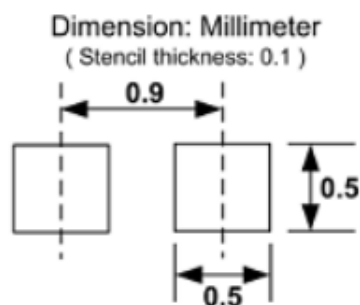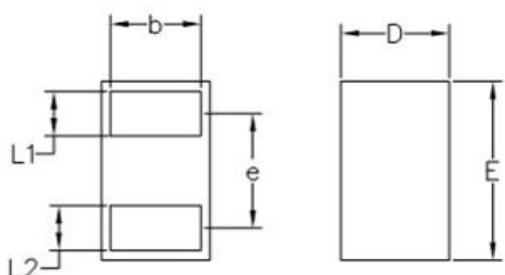

NOTE: ALL DIMENSIONS IN MM

	MIN	NOM	MAX
D	0.55	0.60	0.65
E	0.95	1.00	1.05
L1	0.20	0.25	0.30
L2	0.20	0.25	0.30
A	0.45	0.50	0.55
b	0.45	0.50	0.55
e		0.64BSC	

Marking



Ordering information

Order code	Package	Baseqty	Delivery mode
UMW UCLAMP1201P	SLP1006P2	10000	Tape and reel