




High-Voltage PNP Transistor Surface Mount

 Lead(Pb)-Free



● Maximum Ratings

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	-300	Vdc
Collector-Base Voltage	V_{CBO}	-300	Vdc
Emitter-Base Voltage	V_{EBO}	-5.0	Vdc
Collector Current-Continuous	I_C	-500	mAdc
Total Device Dissipation	P_D	2.0	W
Junction and Storage) Temperature	T_J/T_{stg}	-55 to +150	°C

● Device Marking

PZTA92 = A92

● Electrical Characteristics ($T_A=25^\circ\text{C}$ Unless Otherwise noted)

Characteristics	Symbol	Min	Max	Unit
-----------------	--------	-----	-----	------

Off Characteristics

Collector-Emitter Breakdown Voltage ($I_C=-1.0\text{mAdc}$ $I_B=0$)	$V_{(BR)CEO}$	-300	-	Vdc
Collector-Base Breakdown Voltage ($I_C=-100\mu\text{Adc}$ $I_E=0$)	$V_{(BR)CBO}$	-300	-	Vdc
Emitter-Base Breakdown Voltage ($I_E=-100\mu\text{Adc}$ $I_C=0$)	$V_{(BR)EBO}$	-5.0	-	Vdc
Collect Cutoff Current ($V_{CB}=-200\text{Vdc}$ $I_E=0$)	I_{CBO}	-	-0.25	μAdc
Emitte Cutoff Current ($V_{EB}=-3\text{V}$ $I_C=0$)	I_{EBO}	-	-0.1	μAdc

● **Electrical Characteristics** ($T_A=25^\circ\text{C}$ unless otherwise noted) (Continued)

Characteristics	Symbol	Min	Max	Unit
-----------------	--------	-----	-----	------

● **On Characteristics**

DC Current Gain ($I_C = -1.0\text{ mA dc}$) $V_{CE} = -10\text{ V dc}$ ($I_C = -10\text{ mA dc}$) $V_{CE} = -10\text{ V dc}$ ($I_C = -30\text{ mA dc}$) $V_{CE} = -10\text{ V dc}$	$H_{FE}(1)$ $H_{FE}(2)$ $H_{FE}(3)$	25 40 25	- - -	-
Collector-Emitter Saturation Voltage ($I_C = -20\text{ mA dc}$) $I_B = -2.0\text{ mA dc}$	$V_{CE(sat)}$	-	0.5	Vdc
Base-Emitter Saturation Voltage ($I_C = -20\text{ mA dc}$) $I_B = -2.0\text{ mA dc}$	$V_{BE(sat)}$	-	0.9	Vdc
Current-Gain-Bandwidth Product ($I_C = -10\text{ mA dc}$) $V_{CE} = -20\text{ V dc}$ $f = 100\text{ MHz}$)	f_T	50	-	MHz

Characteristics Curve

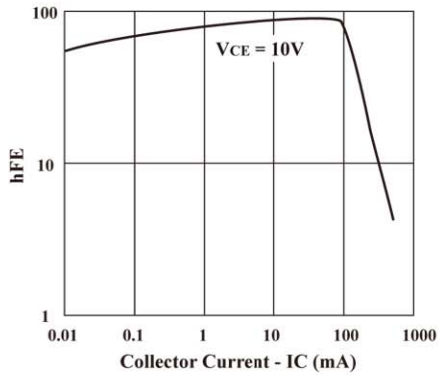


Fig.1 Current Gain & Collector Current

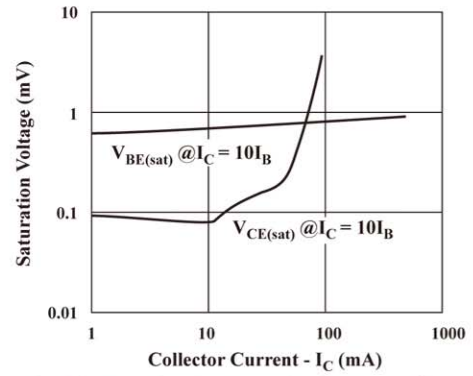


Fig.2 Saturation Voltage & Collector Current

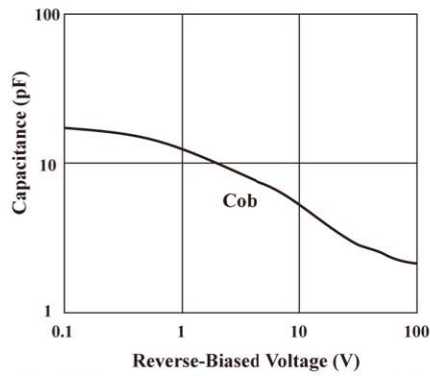


Fig.3 Capacitance & Reverse-Biased Voltage

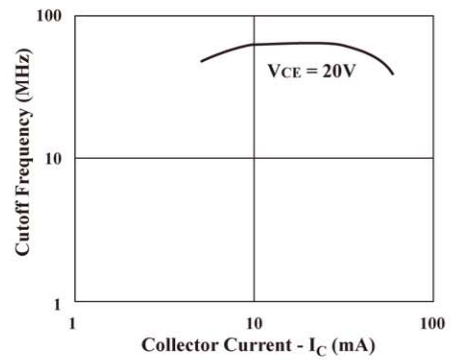


Fig.4 Cutoff Frequency & Collector Current

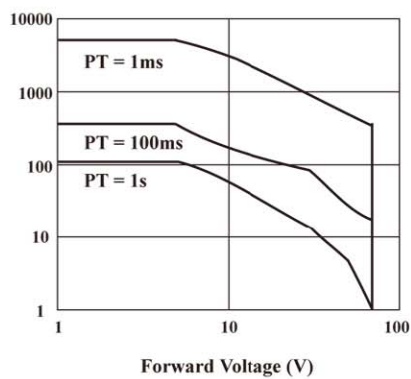


Fig.5 Safe Operating Area

SOT-223 Outline Dimensions

unit:mm

